
fluytec®

FRP/GRP

FTP BL XS Series

FRP/GRP Boltless XS Filter Housings

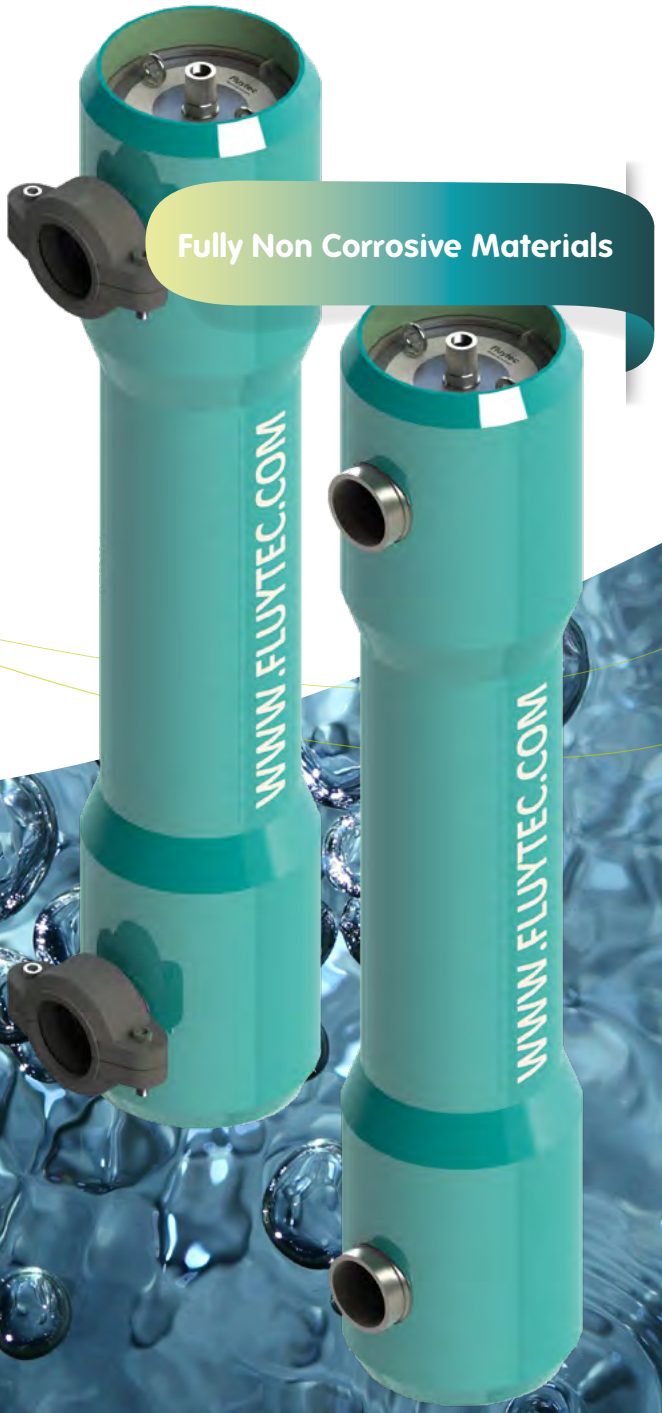

Premium Quality Standards in our most Compact FRP Housings

- FULLY CORROSION RESISTANT
- UV PROTECTION FOR OUTDOORS INSTALLATION
- QUICK & EASY CARTRIDGE REPLACEMENT
- UP TO 16 BAR DESIGN PRESSURE
- 5 PP DOE CARTRIDGES 30" 40"

Design

Fluytec's FRP/GRP Cartridge Filters are engineered to operate in heavy duty applications, providing superb filtration efficiency and durability. Fluytec's continuous development allows introducing new features and functionalities to our products.

FTP BL XS Series have been designed to satisfy the highest technical requirements os small capacity projects, providing a High Quality Standard option with the competitiveness of Fluytec´s FRP housings.

The Boltless XS filters are designed and manufactured according to the ASME X design code. Design pressure is up to 16 Bar for all these models, and the Hydrostatic Tests are performed at 1,43 times the Design Pressure.






Cartridge Installation


"Spring & Nipple" fixing, allows an extremely rapid installation and removal of the cartridges. The careful design and distribution of the tightening rods ensure a perfect sealing of DOE cartridges.


In the lower part, the cartridge is settled in the false bottom plate, guided by a guide tube and a circular knife edge that remains incrusted in the cartridge.

In the upper part a special piece, designed by Fluytec and called "nipple" is connected, assuring their water tightness with a plastic coated spring that presses that "nipple" against the closure plate.

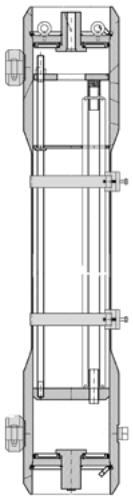









* Request for other Cartridge Types and Configurations at info@fluytec.com

FULLY CORROSION RESISTANT

UV PROTECTION FOR OUTDOORS INSTALLATION

QUICK & EASY CARTRIDGE REPLACEMENT

UP TO 16 BAR DESIGN PRESSURE

5 PP DOE CARTRIDGES 30" 40" 50"

+45 YEARS



Fluytec Solutions Worldwide

Visit our Website for more information

CERTIFIED ISO 9001-14001 UKAS MANAGEMENT SYSTEMS 001

Subject to change without notice.

Pol. Abra Industrial 48500 Abanto-Zierbena Biscay (Spain) | T: (+34) 944 676 150 | info@fluytec.com | fluytec.com